


**BARLOW™**

# FP6807\*\* 52" Ceiling Fan

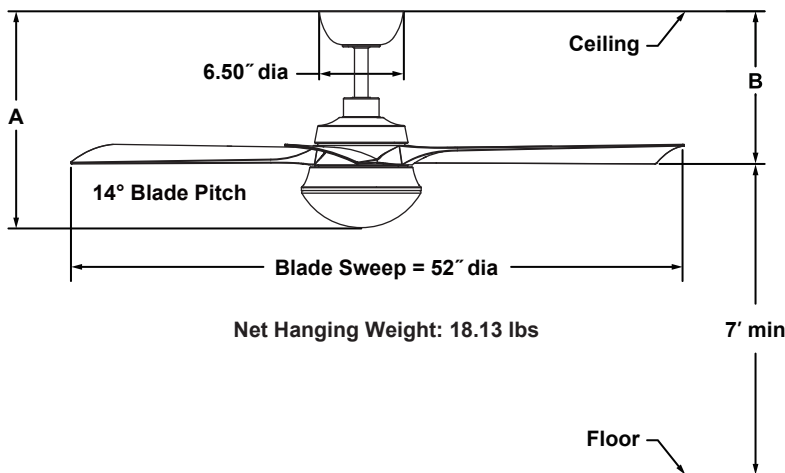

	A	B
Fan w/6" downrod	16.64"	11.75"
Fan w/12" downrod	22.64"	17.75"
Fan w/18" downrod	28.64"	23.75"
Fan w/24" downrod	34.64"	29.75"
Fan w/36" downrod	46.64"	41.75"
Fan w/48" downrod	58.64"	53.75"
Fan w/60" downrod	70.64"	65.75"
Fan w/72" downrod	82.64"	77.75"

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

153 x 20 AC motor is designed for optimal performance with this fan.

### BLADES:

A set of three 25" composite blades is included.

### LIGHTING OPTIONS:

One 24-watt LED included.

### CONTROL OPTIONS:

TR500 hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional WC2WH, WR501WH wall controls and WFR50 WiFi receiver unit are available — sold separately. Instructions are provided with each control.

### DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well — sold separately. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room up to 400 sq ft.

### Available Finishes

AGP	Antique Graphite with Light Oak Blades and Opal Frosted Glass
BL	Black with Black Blades and Opal Frosted Glass
BSBL	Brushed Satin Brass with Black Blades and Opal Frosted Glass
BSMW	Brushed Satin Brass with Matte White Blades and Opal Frosted Glass

### Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	141	5476	93	0.49	59
Med	100	3784	122	0.36	31
Low	60	2222	175	0.23	13

### Energy Guide FTC

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
38	3951	11	105

### Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	24	1	2000	3000	90%